

Exam Code: HH0-200

Exam Name: certified modular integration specialist exam

Vendor: Hitachi Data Systems

Version: DEMO

Part: A

1: You have assembled and installed a Hitachi Thunder 9570V?subsystemRK and a RKA into a 19 inch rack. The system parameters have also been configured. The customer now needs to use port 0A in order to connect HP-UX with a LUN 0 and Solaris with a LUN 0 on the same port. Which two will enable this configuration? (Choose two.)

- A.install the LUN SECURITY license
- B.create two host groups on port 0A
- C.install the LUN-MANAGEMENT license
- D.configure port 0A to work in HP-UX mode

Correct Answers: B C

2: What is the operational humidity requirement at a site when installing a Hitachi Thunder 9500V?Series subsystem?

- A.5% to 90%
- B.8% to 80%
- C.10% to 75%
- D.10% to 90%


Correct Answers: B

3: Which statement is true about cache slots on the Hitachi Thunder 9500V?Series subsystem?

- A.Each controller has two cache slots and each slot can hold 1GB DIMMS for a maximum of 2GB per controller.
- B.Each controller has two cache slots and each slot can hold 512MB or 1GB DIMMS for a maximum of 1GB or 2GB per controller.
- C.Each controller has four cache slots and each slot can hold 512MB or 1GB DIMMS for a maximum of 2 GB or 4GB per controller.
- D.Each controller has four cache slots and each slot can hold 256MB or 512MB DIMMS for a maximum of 1 GB or 2 GB per controller.


Correct Answers: B

4: Click the Task button. Click on the "letter" representing the LED that indicates a failure in the controller.

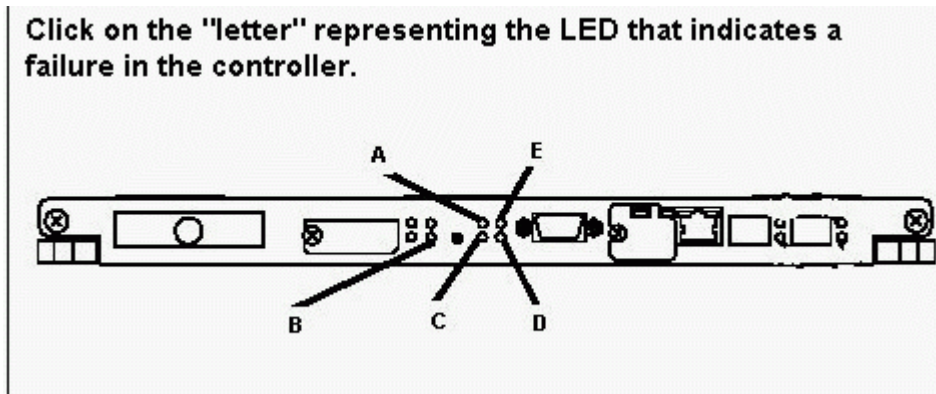

Correct Answers:

Click on the "letter" representing the LED that indicates a failure in the controller.

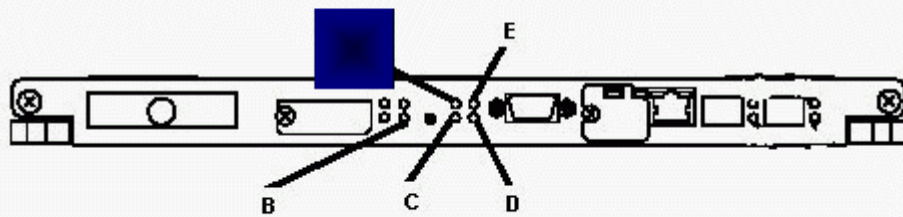

5: Which component on the first RKA is used to connect to the RK in a Hitachi Thunder 9570V?Series subsystem?

- A.PDB
- B.ENC unit
- C.Controller unit
- D.AC Power Unit

Correct Answers: B

6: You are connected to a Hitachi Thunder 9500V?Series subsystem using Hitachi?Resource Manager GUI. You have created LUNs for 12D+1P RAID group, and now you want to set up one spare disk. Given the following steps:

- A.select Settings-> Logical Settings
- B. select Settings-> Configuration Settings
- C. select the Logical Settings tab
- D.select Settings-> Logical Unit-> Set Spare Drive
- E.select the disk that you want to set up as spare
- F.select the Spare Drive tab

- A.B, F, E
- B.B, F, G
- C.D, C, E
- D.F, C, G

Correct Answers: B

7: Ten LUNs must be recognized by the QLogic HBA on Microsoft Windows 2000 Server which is connected to a Hitachi Thunder 9500V?Series subsystem. What is the system parameter that needs to be set up?

- A.in the modify Host Group option, select CCHS mode in Standard mode
- B.in the modify Host Group option, select CCHS mode in Host connection mode
- C.in the modify Host Group option, select HISUP2 mode in Host connection mode
- D.in the modify Host Group option, select HISUP mode in Host connection mode 2

Correct Answers: D

8: You are using the Hitachi?Resource Manager GUI for the first time. You want to change to a

different mode from default mode. What is the first thing you should do, before changing to a different mode?

- A.go to Add-> Password and add the password
- B.go to Add-> Change Mode and select the mode
- C.go to Settings-> Password and register the password
- D.go to Settings-> Change Properties and set the mode option to other modes

Correct Answers: C

9: A customer has Sun Netra Servers mounted on a Hitachi Data Systems?19 inch rack. You need to mount a RK and a RKA on the same rack. What is the amps/PS rating you need to use for both the RK and RKA together in order to ensure that the PDU is not overloaded when two power supplies are used on both the RK and the RKA and the source is 100V?

- A.3.20
- B.5.10
- C.6.30
- D.10.20

Correct Answers: C

10: What is the vibration tolerance of a Hitachi Thunder 9570?subsystem in operation, if installed near large generators located on the floor above or below the subsystem?

- A.2.5 m/s² or less
- B.3.0 m/s² or less
- C.3.5 m/s² or less
- D.4.0 m/s² or less

Correct Answers: A